

Insulated industrial door

Our Insulated Commercial Shutter combines all the qualities of our robust SeceuroDoor 75 but with the added benefit of insulation.


Thermal and Acoustic Insulation

Minimal thermal bridges and the use of fine-pored PU rigid foam infill ensure good thermal insulation whilst curtain and sealing technology used around the entire shutter reduce noise from both inside and outside.


- Heat transmission performance for the 77 mm single slat profile 4.01 W/(m² K)
- Max width 6000 mm
- Max area 20 m²
- Your choice of motor
- Can be powder coated any colour
- Choice of 4 guide arrangement options
- Standard guide angle is 75 mm x 50 mm
Other sizes are available on request

The entire SeceuroDoor range is available as either a direct drive, inboard, single phase or 3 phase.

SLAT, BOTTOM SLAT AND GUIDE

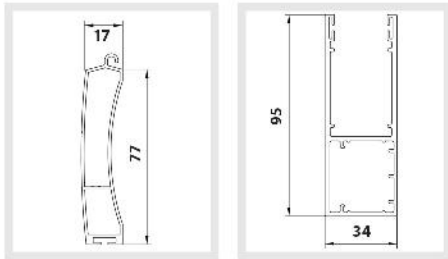

SLAT (INSULATED)

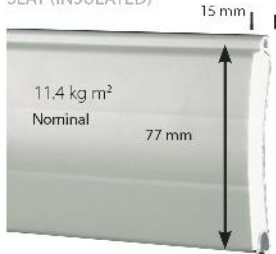

STANDARD CURTAIN & BOTTOM SLAT FINISH: GALVANISED



THIS PRODUCT CAN BE POWDER COATED

Please note: that this product will be powder coated after it has been assembled.

Insulated industrial door


This insulated steel profile is especially resistant to damage and reduces deflection. With the option of interior and exterior identical colour coating our Insulated shutter can easily be blended into the look of any building yet is also available with a galvanised finish.

Thermal and Acoustic Insulation


Minimal thermal bridges and the use of fine-pored PU rigid foam infill ensure good thermal insulation whilst curtain and sealing technology used around the entire shutter reduce noise from both inside and outside.

- Heat transmission performance for an operational door unit 3.9 W/(m² K)
- Acoustic reduction rating of 27 dB
- Max width 7000 mm
- Max height 7000 mm
- Max area 49 m²
- Your choice of motor
- Choice of 4 guide arrangement options
- Standard guide angle is 100 mm x 50 mm
- Vision option available: 100 mm x 55 mm Clear Perspex Vision Panel with a minimum of 200 mm space in between
- Wind class rating: Class 3


SLAT, BOTTOM SLAT AND GUIDES

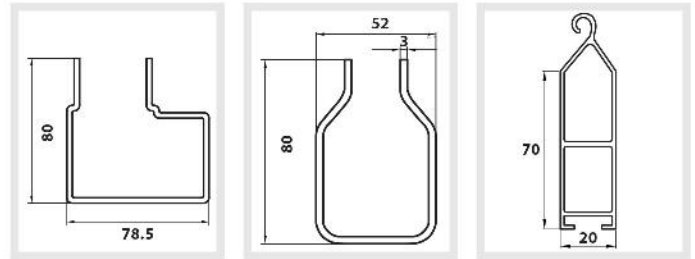

SLAT (INSULATED)

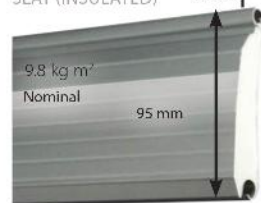

SLAT (VISION)

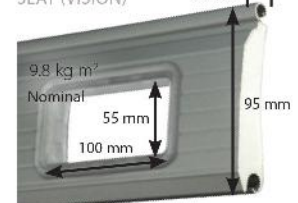

OPTIONAL COLOURS FOR CURTAIN (SLATS), BOTTOM SLAT, BOX & GUIDES



Coloured slats may be subject to longer lead times, please get in touch for more info.

STANDARD CURTAIN & BOTTOM SLAT FINISH: GALVANISED

Bottom slat, box & guides available in a powder coat finish also. Charges apply

Please note:

Colour references on standard product are a guide only and will not match powder coated finish.